


**X-LINE MINI - LED every 25mm**  
820-2580 X-LINE MINI 36 700mA green 47x8° L940mm 38W IP66

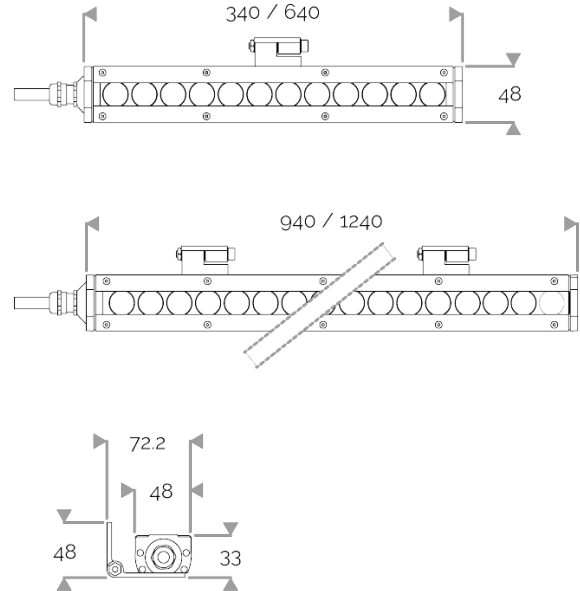

**APPLICATION**

High-power LED luminaire for architectural outdoor lighting. DO NOT RECESS.  
Backlight or accentuation light for use on cornices, rooves, diffused surfaces, walls, columns etc...

**LIGHTING FEATURES**

CRI70. High-power LED luminaire. LED spacing 1 LED every 25 mm. Monochrome version, RGB MIX or WHITE MIX.

**ELECTRICAL FEATURES**

Luminaires are wired in series with a 700mA power supply + 10 kV/5 kA surge protector. Control is to be specified when ordering. Default cable length 1.5m.

**MECHANICAL FEATURES**

IP66, IK07. Anodized aluminium profile. Clear PMMA. Silicone gasket. Delta Seal® treated stainless steel fasteners. Glare shield comes in raw aluminium with the RAL colour to be specified.  
Weights: 340mm: 0,75 kg. 640mm: 1,4 kg. 940mm: 2 kg. 1240mm: 2,5 kg.

**WARRANTY**

5-year warranty: on LED module and driver (see the FLUX conditions).



**Lifetime: 60 000 hours L80 B10**

**LUMEN DATA**

|                                |        |
|--------------------------------|--------|
| Lumen nominal total green (lm) | 3495,6 |
| lm/W LED green                 | 93,4   |
| Qty LED                        | 36     |
| Ta max.                        | 30°C   |
| Tj (at 25°C)                   | 85°C   |

**POWER**

|                       |      |
|-----------------------|------|
| Product Led Power (W) | 37,4 |
|-----------------------|------|

