
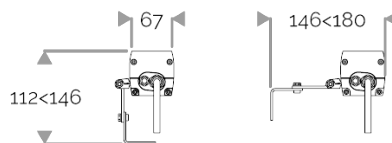
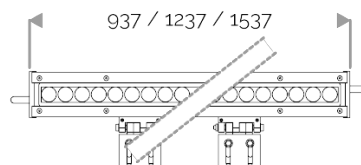


**X-LINE<sup>3</sup> - LED every 25mm**

821-3670 X-LINE<sup>3</sup> 24 230V red 2x22.5° L637mm 18W IP66



## X-LINE<sup>3</sup> - LED every 25mm

### 821-3670 X-LINE<sup>3</sup> 24 230V red 2x22.5° L637mm 18W IP66

#### APPLICATION

High-power LED luminaire for outdoor lighting. DO NOT RECESS.  
Backlight or accentuation light for use on cornices, rooves, diffused surfaces, walls, columns etc...



#### LIGHTING FEATURES

CRI70. High-power LED luminaire. Monochrome version, RGB MIX or WHITE MIX.

#### ELECTRICAL FEATURES

230V mains connection. Integrated driver. Built-in 10 kV/5 kA surge protection. Control to be specified when ordering. Default cable length 1.5m. DMX version contains the plug and socket CONNECT SYSTEM for easy installation.

#### MECHANICAL FEATURES

IP66, IK06. Anodized aluminium profile. Clear PMMA. Silicone gasket. Product is mounted on two anodized aluminium brackets. Delta Seal® treated stainless steel fasteners. Glare shield comes in raw aluminium with the RAL colour to be specified.

Weights: 187mm: 0,9 kg. 337mm: 1,5 kg. 637mm: 2,5 kg. 937mm: 3,5 kg. 1237mm: 5 kg. 1537mm: 6 kg.

#### WARRANTY

5-year warranty: on LED module and driver (see the FLUX conditions).



**Lifetime: 60 000 hours L80 B10**

#### LUMEN DATA

Lumen nominal total red (lm)	1125,6
lm/W LED red	64,2
lm/W product red	42,2
Qty LED	24
Ta max.	30°C
Tj (at 25°C)	85°C

#### INRUSH CURRENT

Inrush Current (A)	60
Inrush Current Time (µs)	210

#### POWER

Product Led Power (W)	17,5
Product Power (W)	26,6

