


## X-LINE QUATTRO - Custom colours

823-0135 X-LINE QUATTRO 5 230V DMX RGB-4000K 2x5° L360mm 29W IP66

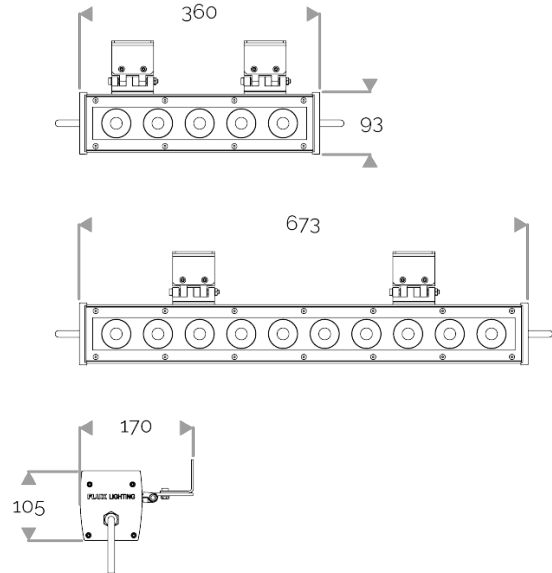

### APPLICATION

High-power LED luminaire for outdoor lighting available in custom colours. DO NOT RECESS. Accentuation lighting for architectural facades, shop fronts, sculptures, columns etc...

### LIGHTING FEATURES

CRI70. 230V luminaire for outdoor lighting with 20 or 40 LED: : RGBW or customised choice of 2 to 4 colours.

### ELECTRICAL FEATURES

CONNECT SYSTEM for reliable and fast installation. Integrated DMX power supply. Built-in 10 kV/5 kA surge protection.

### MECHANICAL FEATURES

IP66, IK06. Anodized aluminium profile. Clear PMMA. Silicone gasket. Delta Seal® treated stainless steel fasteners.  
Weights: 360mm : 3,8 kg. 673mm : 7 kg.

### WARRANTY

5-year warranty: on LED module and driver (see the FLUX conditions).



**Lifetime: 60 000 hours L80 B10**

### LUMEN DATA

|  |       |
|--|-------|
| Lumen nominal total neutral white 4000K (lm) | 823,5 |
| Lumen nominal total red (lm)                 | 314   |
| Lumen nominal total green (lm)               | 595,5 |
| Lumen nominal total royal blue (mW)          | 3557  |
| lm/W LED neutral white 4000K                 | 109,1 |
| lm/W LED red                                 | 56,6  |
| lm/W LED green                               | 75,9  |
| mW/W LED royal blue                          | 465   |
| Qty LED                                      | 5     |
| Ta max.                                      | 30°C  |
| Tj (at 25°C)                                 | 85°C  |

### INRUSH CURRENT

|                    |    |
|--------------------|----|
| Inrush Current (A) | 60 |
|--------------------|----|

### POWER

|                       |      |
|-----------------------|------|
| Product Led Power (W) | 28,6 |
| Product Power (W)     | 34,7 |



**X-LINE QUATTRO - Custom colours**

**823-0135 X-LINE QUATTRO 5 230V DMX RGB-4000K 2x5° L360mm 29W IP66**

