


TECHNICAL DATA

302-0010 Power supply 24V DC 60W IP67



**FLUX
LIGHTING**



2018-12-12

☉ **RoHS**

Photo & sketch:

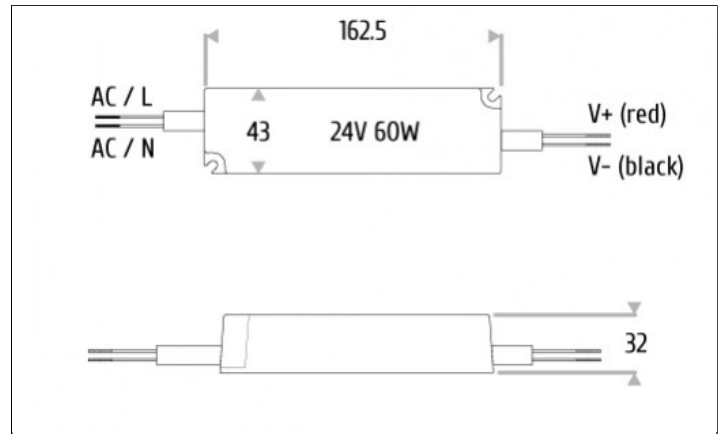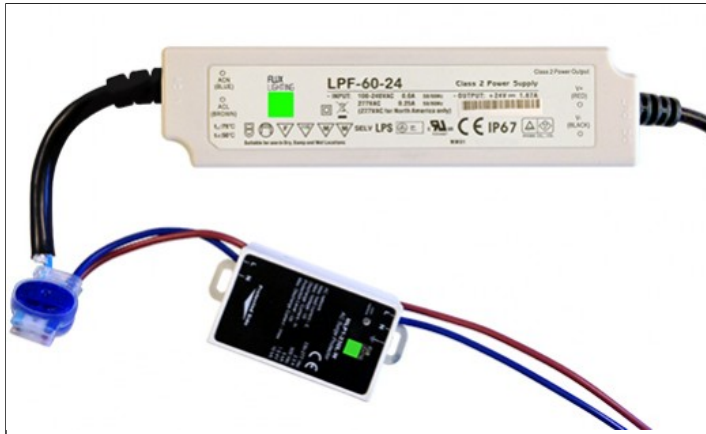

CLASSIFICATION

IP67 / Class II.

PRIMARY VOLTAGE

100 - 240V AC.

FREQUENCY

50 / 60Hz.

OUTPUT CURRENT MAX.

2,5A.

POWER FACTOR

PF > 0,95 / 230V AC.

INRUSH CURRENT

55A / 230V AC.


SECONDARY VOLTAGE

24V DC.

TECHNICAL DATA

302-0010 Power supply 24V DC 60W IP67

FLUX
LIGHTING



INPUT CABLE & OUTPUT CABLE

1.
5mm² x 2c (AC / L : brown ; AC / N : blue) & 0,8mm² x 2c (red V+ ; black V -).

PROTECTIONS

Short circuit, overload, overvoltage, over temperature.

AMBIENT TEMPERATURE MAX.

30°C.

STANDARD

EN61347-2-13.

POWER SUPPLY MATERIALS

Isolated plastic case.

WEIGHT & DIMENSIONS (L x l x H) POWER SUPPLY

0,44Kg / 162,5x43x32mm.

SURGE PROTECTOR

10kA/5kA, code: 012-9070.

SURGE PROTECTOR MATERIALS

Isolated plastic case.

WEIGHT & DIMENSIONS (L x l x H) OF SURGE PROTECTOR

38x65x33mm / 104g.