


# TECHNICAL DATA

**302-0025** Power supply 48V DC 40W IP67



**FLUX  
LIGHTING**



2018-12-12

CE RoHS

Photo & sketch:

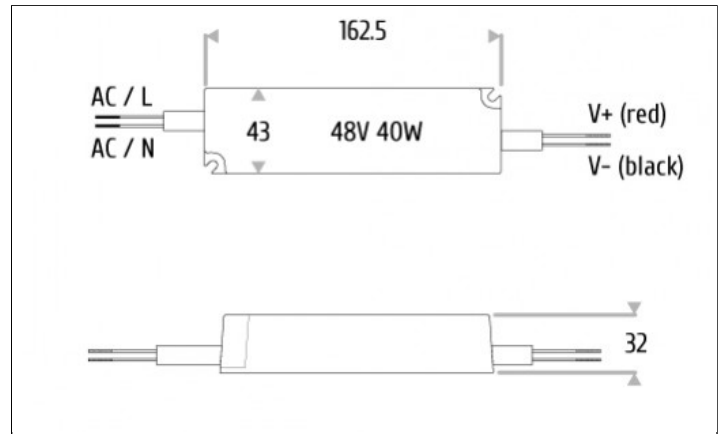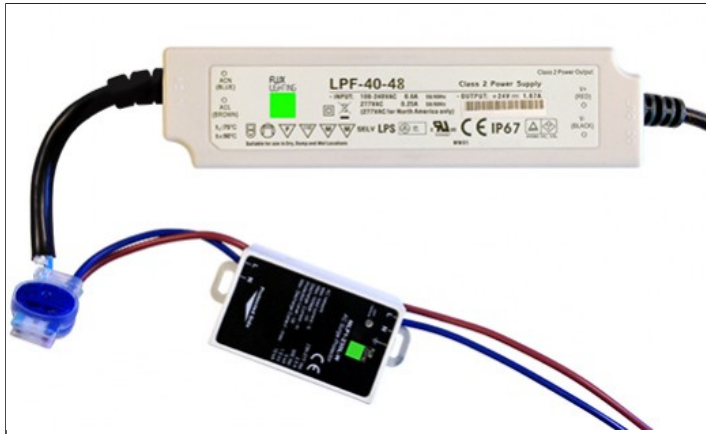

## CLASSIFICATION

IP67 / Class II.

## PRIMARY VOLTAGE

100 - 240V AC.

## FREQUENCY

50 / 60Hz.

## OUTPUT CURRENT MAX.

0,84A.

## POWER FACTOR

PF > 0,95 / 230V AC.

## INRUSH CURRENT

50A / 230V AC.


## SECONDARY VOLTAGE

48V DC.

# TECHNICAL DATA

**302-0025** Power supply 48V DC 40W IP67

FLUX  
LIGHTING



## INPUT CABLE & OUTPUT CABLE

---

1.  
5mm<sup>2</sup> x 2c (AC/L: brown; AC/N: blue) & 0,8mm<sup>2</sup> x 2c (AC / L : marron ; AC / N : bleu).

## PROTECTIONS

---

Short circuit, overload, overvoltage, over temperature.

## AMBIENT TEMPERATURE MAX.

---

30°C.

## POWER SUPPLY MATERIALS

---

Isolated plastic case.

## WEIGHT & DIMENSIONS (L x l x H) POWER SUPPLY

---

0,44Kg / 162,5x43x32mm.

## SURGE PROTECTOR

---

10kA/5kA.

## SURGE PROTECTOR MATERIALS

---

Isolated plastic case.

## WEIGHT & DIMENSIONS (L x l x H) OF SURGE PROTECTOR

---

38x65x33mm / 104g.