


# TECHNICAL DATA

**302-0035** Power supply 48V DC 100W IP67


**FLUX  
LIGHTING**



2018-12-12

RoHS

Photo & sketch:

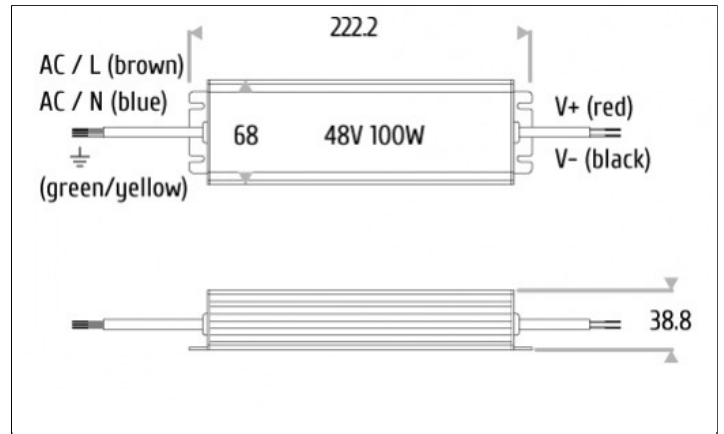

## CLASSIFICATION

IP67 / Class I.

## PRIMARY VOLTAGE

100 - 240V AC.

## FREQUENCY

50 / 60Hz.

## OUTPUT CURRENT MAX.

2A.

## POWER FACTOR

PF > 0,95 / 230V AC.

## INRUSH CURRENT

40A / 230VAC.


## SECONDARY VOLTAGE

48V DC.

# TECHNICAL DATA

**302-0035** Power supply 48V DC 100W IP67

FLUX  
LIGHTING



## INPUT CABLE & OUTPUT CABLE

---

1.  
5mm<sup>2</sup> x 3c (AC/L: brown; AC/N: blue; FG: green/yellow) 0,8mm<sup>2</sup> x 2c (red V+ ; black V -).

## PROTECTIONS

---

Short circuit, overload, overvoltage, over temperature.

## AMBIENT TEMPERATURE MAX.

---

30°C.

## POWER SUPPLY MATERIALS

---

Aluminium.

## WEIGHT & DIMENSIONS (L x l x H) POWER SUPPLY

---

1Kg / 222,2x68x38,8mm.

## SURGE PROTECTOR

---

10kA/5kA.

## SURGE PROTECTOR MATERIALS

---

Isolated plastic case.

## WEIGHT & DIMENSIONS (L x l x H) OF SURGE PROTECTOR

---

38x65x33mm / 104g.