


TECHNICAL DATA

302-0120 Power supply 700mA 150W IP67



**FLUX
LIGHTING**



2018-12-12

CE RoHS

Photo & sketch:

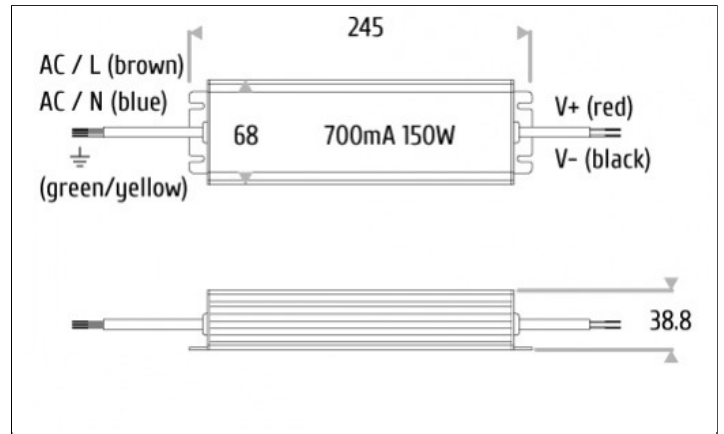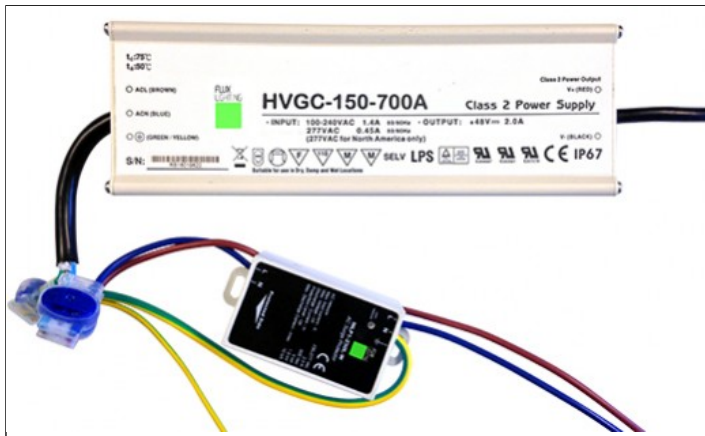

CLASSIFICATION

IP65 / Class I.

PRIMARY VOLTAGE

200-480V AC.

FREQUENCY

50 / 60Hz.

OUTPUT CURRENT MAX.

700mA.

POWER FACTOR

0,98 at full load.

SECONDARY VOLTAGE

21-215V DC.


INPUT CABLE & OUTPUT CABLE

1.
5mm² x 3c (AC/L: brown; AC/N: blue; FG: green/yellow) 0,8mm² x 2c (red V+ ; black V -).

TECHNICAL DATA

302-0120 Power supply 700mA 150W IP67

FLUX
LIGHTING



PROTECTIONS

Short-circuit, over voltage, over temperature.

AMBIENT TEMPERATURE MAX.

30°C.

POWER SUPPLY MATERIALS

Aluminium.

WEIGHT & DIMENSIONS (L x l x H) POWER SUPPLY

1,24Kg / 245x68x38,8mm.

SURGE PROTECTOR

10kA/5kA.

SURGE PROTECTOR MATERIALS

Isolated plastic case.

WEIGHT & DIMENSIONS (L x l x H) OF SURGE PROTECTOR

38x65x33mm / 104g.