


TECHNICAL DATA

302-0180 Power supply 24V DC 100W IP20



**FLUX
LIGHTING**



2018-12-12

CE RoHS

Photo & sketch:

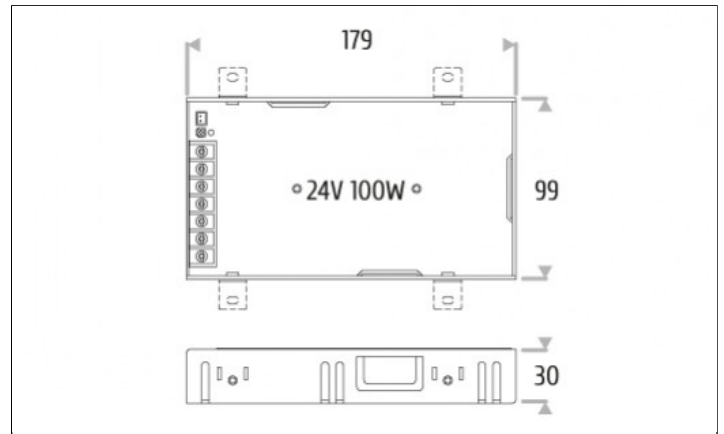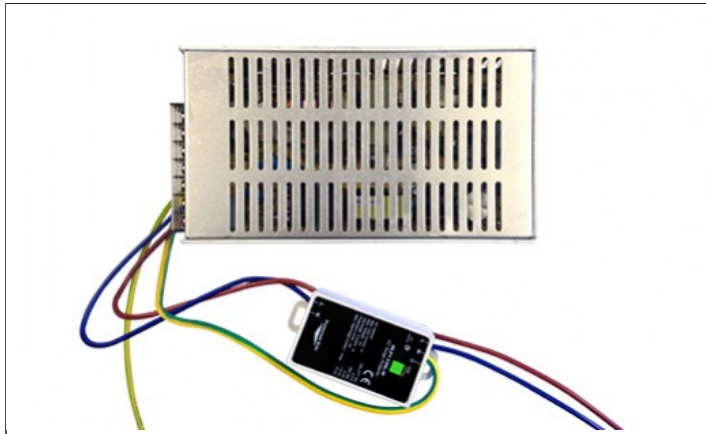

CLASSIFICATION

IP20 / Class I.

PRIMARY VOLTAGE

100 - 240V AC.

FREQUENCY

50 / 60Hz.

OUTPUT CURRENT MAX.

4,2A.

POWER FACTOR

PF > 0,93 / 230V AC.

INRUSH CURRENT

35A/230V AC.


SECONDARY VOLTAGE

24V DC.

TECHNICAL DATA

302-0180 Power supply 24V DC 100W IP20

FLUX
LIGHTING



INPUT CABLE & OUTPUT CABLE

1.
5mm² x 3c (AC/L: brown; AC/N: blue; FG: green/yellow) 0,8mm² x 2c (red V+ ; black V -).

PROTECTIONS

Short circuit, overload, overvoltage.

AMBIENT TEMPERATURE MAX.

30°C.

POWER SUPPLY MATERIALS

Aluminium.

WEIGHT & DIMENSIONS (L x l x H) POWER SUPPLY

0,52Kg / 179x99x30mm.

SURGE PROTECTOR

10kA/5kA.

SURGE PROTECTOR MATERIALS

Isolated plastic case.

WEIGHT & DIMENSIONS (L x l x H) OF SURGE PROTECTOR

38x65x33mm / 104g.