
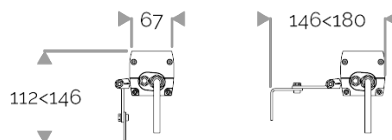
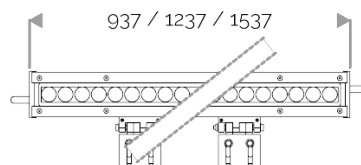


**X-LINE<sup>3</sup> - LED every 25mm - 6W to 60W - up to 6210 lm - 187 mm to 1537 mm**  
**821-3190-HT X-LINE<sup>3</sup> 12 230V warm white 3000K 2x15° L337mm 6W IP66**

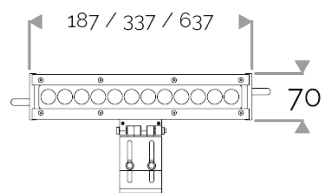

**X-LINE<sup>3</sup> - LED every 25mm - 6W to 60W - up to 6210 lm - 187 mm to 1537 mm**  
**821-3190-HT X-LINE<sup>3</sup> 12 230V warm white 3000K 2x15° L337mm 6W IP66**

**APPLICATION**

High-power LED luminaire for outdoor lighting. DO NOT RECESS.  
 Backlight or accentuation light for use on cornices, rooves, diffused surfaces, walls, columns etc ...



**LIGHTING FEATURES**

CRI70. High-power LED luminaire. Monochrome version, RGB MIX or WHITE MIX.



**ELECTRICAL FEATURES**

230V mains connection. Integrated driver. Built-in 10 kV/5 kA surge protection. Control to be specified when ordering. Default cable length 1.5m. DMX version contains the plug and socket CONNECT SYSTEM for easy installation.

**CABLES USED**

Fixed version: HO7RN-F 3G1,5mm<sup>2</sup> cable: phase (brown), neutral (blue) & ground (green/yellow). Length: 150cm.

DMX version: CONNECT SYSTEM cable. Length: 50cm.

DALI version: HO7RN-F 3G1,5mm<sup>2</sup> cable: phase (brown), neutral (blue) & ground (green/yellow) + 2x0,5mm<sup>2</sup> cable: black- and red+. Length: 150cm.

**MECHANICAL FEATURES**

IP66, IK06. Anodized aluminium profile. Clear PMMA. Silicone gasket. Product is mounted on two anodized aluminium brackets. Delta Seal® treated stainless steel fasteners. Glare shield comes in raw aluminium with the RAL colour to be specified. Weights: 187mm: 0,9 kg. 337mm: 1,5 kg. 637mm: 2,5 kg. 937mm: 3,5 kg. 1237mm: 5 kg. 1537mm: 6 kg.

**WARRANTY**

5-year warranty: on LED module and driver (see the FLUX conditions).

**Lifetime: 60 000 hours L80 B10**

**LUMEN DATA**

Lumen nominal total warm white 3000K (lm)	690
lm/W LED warm white 3000K	115
lm/W product warm white 3000K	70,1
Qty LED	12
Ta max.	50°C
Tj (at 25°C)	85°C

**INRUSH CURRENT**

Inrush Current (A)	1,7
Inrush Current Time (µs)	80

**POWER**

Product Led Power (W)	6
Product Power (W)	9,8

