


TECHNICAL DATA

302-0065 Power supply 700mA 36W IP67



**FLUX
LIGHTING**



2018-12-12

CE RoHS

Photo & sketch:

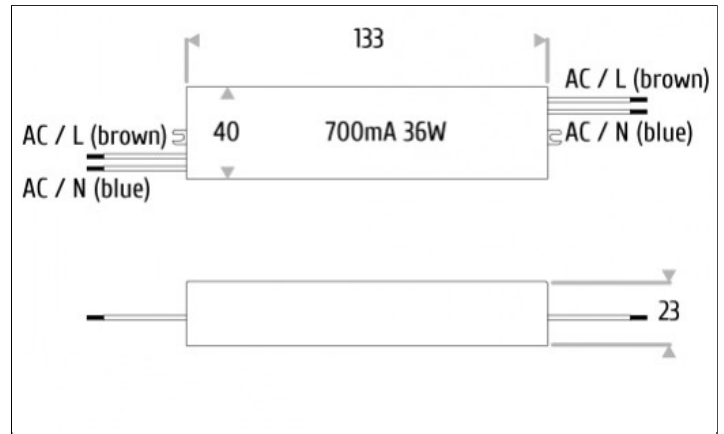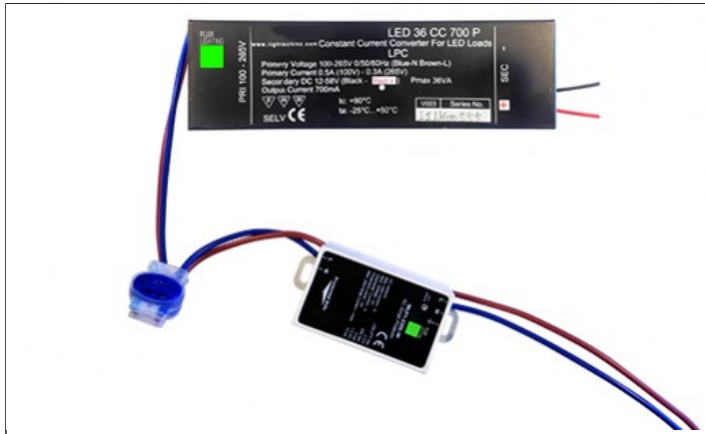

CLASSIFICATION

IP67.

ELECTRICAL CLASS

Class II.

PRIMARY VOLTAGE

220 - 240V AC.

FREQUENCY

50 / 60Hz.

OUTPUT CURRENT MAX.

700mA.

POWER FACTOR

0,97.


SECONDARY VOLTAGE

4 - 52V DC.

TECHNICAL DATA

302-0065 Power supply 700mA 36W IP67

FLUX
LIGHTING



INPUT CABLE & OUTPUT CABLE

1.
5mm² x 2c (AC/L: brown; AC/N: blue) & 0,8mm² x 2c (AC / L : marron ; AC / N : bleu).

PROTECTIONS

Over temperature, secondary protection.

AMBIENT TEMPERATURE MAX.

30°C.

POWER SUPPLY MATERIALS

Aluminium.

WEIGHT & DIMENSIONS (L x l x H) POWER SUPPLY

0,22Kg / 133x40x30,5mm.

SURGE PROTECTOR

10kA/5kA.

SURGE PROTECTOR MATERIALS

Isolated plastic case.

WEIGHT & DIMENSIONS (L x l x H) OF SURGE PROTECTOR

38x65x33mm / 104g.